



WE SERVES THE RIGHT SOLUTION FOR EVERY INDUSTRIAL NEEDS.



UNDERCOUNTER DISHWASHER PROLITE FXB



made in germany

TECHNICAL DATA

Cycle times*	90 / 180 / 360 sec. and self-cleaning programme
Water consumption	2.0 l/rack
Tank capacity	10.6 l
Tank heating	1.7 kW
Power supply	400 / 50 / 3N (230 / 50 / 1)
Booster loading	
Standard	6.2 kW
Alternative	2.1 kW
Total loading	
Standard	6.8 kW 3 x 16 A
Alternative	2.7 kW 16 A
Wash pump	0.5 kW
Rack size	500 x 500 500 x 530 mm
Loading height	425 mm
Noise level	59 dB (A)
Weight (gross/net)	70 / 60 kg

PRODUCT ADVANTAGES

- Electronic control with digital temperature indication and 3 programmes for easy operation.
- GENIUS-X fine filter system: ensures the best wash result and saves energy and detergent costs.
- CLIP-IN wash and rinse arms: wash and rinse arms can be removed without any tools.
- Thermostop function: automatic cycle time control to achieve hygienic rinsing temperatures.
- Double-walled housing: the machine is double-walled, soundproof and heat-insulated.
- Smooth counterbalanced door: soft, silent opening and closing. The dishwasher doors have gas-filled shock absorbers to protect your tableware and prevent wear of the door suspension.
- Optional refill signal: monitors contents of external chemical containers at any time. The control indicates well in advance when detergent and rinse aid need refilling.
- Optional 2IN1 double rack system: two racks can be washed in a single wash cycle. Thanks to the optimum use of the entire wash chamber, the performance of the machine can be doubled.
- Thermolabel 71 °C: default temperatures setting acc. European DIN can be switched by operator to a higher thermolable setting.

CONNECTIONS

(1) Drain hose	2,000 mm ID20 / AD25
(2) Supply hose	2,000 mm R 3/4"
Required flow rate	5 l/min
Flow pressure	0.5 - 10 (with softener: 0.8 - 10) bar
Max. supply temperature	60 °C
(3) Connection cable	2,000 mm
Supply hose for	
(4) Detergent	2,500 mm
(5) Rinse aid	2,500 mm

* The machine is equipped with an automatic programme time extension which ensures hygienic rinse temperatures, even on a cold-water supply or 230 V connection.
For machine protection the water hardness should not exceed 3°dH, if higher we recommend using an integrated water softener or an external water softener of the product line HYDROLINE PROTECT.
To avoid spots and streaks on the wash ware, we recommend the usage of an demineralisation cartridge (HYDROLINE STAR / STAR EXTRA) or a reverse osmosis system HYDROLINE PURE (please refer to HOBART Export price list 2022, chapter 1.6).

Page-01: EFFECTIVE: May 01, 2022



Business Contact

KATEKHUMNUAN LAMLERTPRASERT
Marketing Manager

Phone: +66(0)62 464 4455, +66(0)81 422 3068,
+66(0)94 959 5536

E-Mail: wedosol.mkt@gmail.com
themapleteam@gmail.com



Office : WE DO SOLUTION CO., LTD.

บริษัท วิ ดู โซลูชั่นส์ จำกัด (สำนักงานใหญ่)

Address :
38/2, Moo 6, Nakhon-In Rd.,
Bang Krudi, Nonthaburi 11130

@maplecool
https://www.themaplecake.com

38/2 หมู่ 6 , ถ.นครินทร์ ด.บางขุนทอง
อ.บางกรวย จ.นนทบุรี 11130



https://www.themaplecake.com



WE SERVES THE RIGHT SOLUTION FOR EVERY INDUSTRIAL NEEDS.



UNDERCOUNTER DISHWASHER PROLITE FXB


HOBART

BASIC MODEL

- Front door machine with optional double rack system
- Capacity up to 40 racks/h, 720 plates/h, 1,440 glasses/h
- Nominal capacity with double rack: up to 80 racks/h (40 plate racks + 40 glass/cup racks)
- 3 automatic cycles: short, standard and intensive programme
- Self-cleaning programme
- Ready to install - completely equipped: fill / drain hose, power cord, detergent dispenser, rinse aid dispenser, rinse pump, drain pump, back-flow preventer
- Multi-phasing: machine can be switched from 400 V to 230 V on site
- Shock-absorbing door with closing mechanism
- Tank, frame, rinse arm and panels are stainless steel 1.4301
- 1 plate rack P-18-12, 1 universal flat rack B-00-07, 1 plastic cutlery rack 01-246175-1 consisting of 4 compartments

made in germany

DRAWING

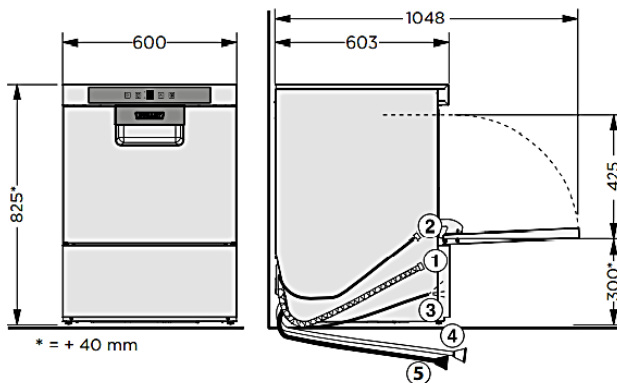

CE



Page-02: EFFECTIVE: May 01, 2022



Business Contact

KATEKHUMNUAN LAMLERTPRASERT
Marketing Manager

Phone: +66(0)62 464 4455, +66(0)81 422 3068,
+66(0)94 959 5536

E-Mail: wedosol.mkt@gmail.com
themapleteam@gmail.com



Office : WE DO SOLUTION CO., LTD.

บริษัท วิ ดู โซลูชั่นส์ จำกัด (สำนักงานใหญ่)

Address :
38/2, Moo 6, Nakhon-In Rd.,
Bang Krudi, Nonthaburi 11130

@maplecool
<https://www.themaplecake.com>

38/2 หมู่ 6 , ถนนอินทร์ ด.บางขุนทอง
อ.บางกรวย จ.นนทบุรี 11130



<https://www.themaplecake.com>