



UNDERCOUNTER SERIES



depth 600mm

Refrigerator

- ▷RT-126MA-S
- ▷RT-156MA-S
- ▷RT-186MA-S

Freezer

- ▷FT-126MA-S
- ▷FT-156MA-S
- ▷FT-186MA-S

depth 750mm

Refrigerator

- ▷RT-128MA-S
- ▷RT-158MA-S
- ▷RT-188MA-S

Freezer

- ▷FT-128MA-S
- ▷FT-158MA-S
- ▷FT-188MA-S

DRAWER SERIES

Providing more options for customer, Hoshizaki's refrigerator and freezers configured as drawers enable quicker access to regularly used items with each dedicated drawer. Suitable for kitchens that replenishes its produce often, its low height also maximizes space and each item come in drawers choices.



A-FIT FEATURES

- ▷efficient cooling with improved defrost system
- ▷special coating for a more durable evaporator
- ▷advanced electric controller with clear digital display
- ▷drain heater available
- ▷removable refrigerator unit (for upright units)
- ▷removable door gaskets
- ▷rounded edges for easy cleaning
- ▷automatic closing doors reduces energy consumption
- ▷adjustable legs
- ▷full height handle

REACH-IN SERIES



Refrigerator

- ▷HR-78MA-S
- ▷HR-128MA-S
- ▷HR-148MA-S
- ▷HR-188MA-S

Freezer

- ▷HF-78MA-S
- ▷HF-128MA-S
- ▷HF-148MA-S
- ▷HF-188MA-S

*Combo

- ▷HRF-78MA-S
- ▷HRF-128MA-S
- ▷HRF-148MA-S
- ▷HRF-188MA-S

(*dual temperature in a single unit)

▷ UPRIGHT SERIES



▷ COMBO SERIES




HOSHIZAKI A-FIT

In line with our focus on engineering refrigeration systems suitable for each market segment, the A-FIT series is designed for those who seek the basics, Simple in outlook yet uncompromising on cooling technologies; any A-FIT refrigerator, freezer and upright combination will provide an all-round efficiency.




DIMENSIONS & SPECIFICATION

REFRIGERATOR & FREEZER (UNDERCOUNTER 600MM DEPTH)




▷ REFRIGERATOR
RT-126MA-S

▷ FREEZER
FT-126MA-S



▷ REFRIGERATOR
RT-156MA-S


▷ FREEZER
FT-156MA-S



▷ REFRIGERATOR
RT-186MA-S


▷ FREEZER
FT-186MA-S

REFRIGERATOR & FREEZER (UNDERCOUNTER 750MM DEPTH)



▷ REFRIGERATOR
RT-128MA-S

▷ FREEZER
FT-128MA-S



▷ REFRIGERATOR
RT-158MA-S

▷ FREEZER
FT-158MA-S



▷ REFRIGERATOR
RT-188MA-S

▷ FREEZER
FT-188MA-S

A-FIT SERIES Refrigerator

Undercounter Type (Depth 600mm)	RT-126MA-S	RT-156MA-S	RT-186MA-S
POWER SUPPLY	1Phase 220-240V 50Hz	1Phase 220-240V 50Hz	1Phase 220-240V 50Hz
HEAT REJECTION	350W	360W	380W
STORAGE CAPACITY	231L	318L	401L
EXTERNAL DIMENSIONS	W1200-D600-H850mm	W1500-D600-H850mm	W1800-D600-H850mm
NET WEIGHT	67kg	80kg	93kg
Undercounter Type (Depth 750mm)	RT-128MA-S	RT-158MA-S	RT-188MA-S
POWER SUPPLY	1Phase 220-240V 50Hz	1Phase 220-240V 50Hz	1Phase 220-240V 50Hz
HEAT REJECTION	350W	360W	380W
STORAGE CAPACITY	307L	420L	530L
EXTERNAL DIMENSIONS	W1200-D750-H850mm	W1500-D750-H850mm	W1800-D750-H850mm
NET WEIGHT	73kg	87kg	101kg
* OPERATION CONDITIONS : Ambient Temperature 5°C - 38°C Voltage Range: Rated Voltage ±6%			
* Height Dimension Includes Leg Height Of 150mm			
TEMPERATURE CONTROL: -6°C ~ 12°C			

A-FIT SERIES Freezer


Undercounter Type (Depth 600mm)	FT-126MA-S	FT-156MA-S	FT-186MA-S
POWER SUPPLY	1Phase 220V 50Hz	1Phase 220V 50Hz	1Phase 220V 50Hz
HEAT REJECTION	670W	670W	710W
STORAGE CAPACITY	231L	318L	401L
EXTERNAL DIMENSIONS	W1200-D600-H850mm	W1500-D600-H850mm	W1800-D600-H850mm
NET WEIGHT	72kg	86kg	99kg
Undercounter Type (Depth 750mm)	FT-128MA-S	FT-158MA-S	FT-188MA-S
POWER SUPPLY	1Phase 220 50Hz	1Phase 220V 50Hz	1Phase 220V 50Hz
HEAT REJECTION	670W	710W	710W
STORAGE CAPACITY	307L	420L	530L
EXTERNAL DIMENSIONS	W1200-D750-H850mm	W1500-D750-H850mm	W1800-D750-H850mm
NET WEIGHT	78kg	93kg	107kg
* OPERATION CONDITIONS : Ambient Temperature 5°C ~ 38°C Voltage Range: Rated Voltage ±6%			
* Height Dimension Includes Leg Height Of 150mm			
TEMPERATURE CONTROL: -23°C~-7°C			

REFRIGERATOR & FREEZER (REACH-IN)




▷ REFRIGERATOR
HR-78MA-S

▷ FREEZER
HF-78MA-S

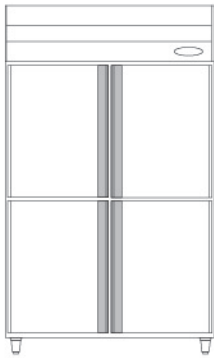


▷ REFRIGERATOR
HR-128MA-S

▷ FREEZER
HF-128MA-S

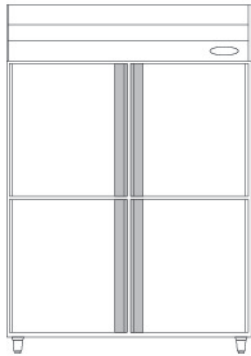

▷ REFRIGERATOR
HR-148MA-S

▷ FREEZER
HF-148MA-S

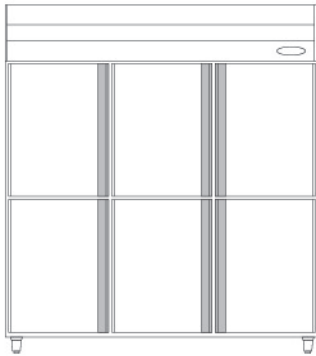

▷ REFRIGERATOR
HR-188MA-S

▷ FREEZER
HF-188MA-S

A-FIT SERIES Refrigerator

Reach-in Type	HR-78MA-S	HR-128MA-S	HR-148MA-S	HR-188MA-S
POWER SUPPLY	1Phase 220-240V 50Hz	1Phase 220-240V 50Hz	1Phase 220-240V 50Hz	1Phase 220-240V 50Hz
HEAT REJECTION	410W	560W	610W	790W
STORAGE CAPACITY	502L	905L	1082L	1451L
EXTERNAL DIMENSIONS	W700-D800-H2050mm	W1200-D800-H2050mm	W1400-D800-H2050mm	W1800-D800-H2050mm
NET WEIGHT	111kg	130kg	152kg	203kg
* OPERATION CONDITIONS : Ambient Temperature 5°C - 43°C Voltage Range: Rated Voltage ±6%				
* Height Dimension Includes Leg Height Of 150mm				
TEMPERATURE CONTROL: -6°C ~ 12°C				

A-FIT SERIES Freezer

Reach-in Type	HF-78MA-S	HF-128MA-S	HF-148MA-S	HF-188MA-S
POWER SUPPLY	1Phase 220-240V 50Hz	1Phase 220-240V 50Hz	1Phase 220-240V 50Hz	1Phase 220-240V 50Hz
HEAT REJECTION	670W	1030W	1150W	1210W
STORAGE CAPACITY	502L	905L	1082L	1451L
EXTERNAL DIMENSIONS	W700-D800-H2050mm	W1200-D800-H2050mm	W1400-D800-H2050mm	W1800-D800-H2050mm
NET WEIGHT	111kg	140kg	152kg	213kg
* OPERATION CONDITIONS : Ambient Temperature 5°C ~ 43°C Voltage Range: Rated Voltage ±6%				
* Height Dimension Includes Leg Height Of 150mm				
TEMPERATURE CONTROL: -23°C~-7°C				


REFRIGERATOR & FREEZER (COMBO REACH-IN)




▷ REFRIGERATOR &
FREEZER
HRF-78MA-S



▷ REFRIGERATOR &
FREEZER
HRF-128MA-S

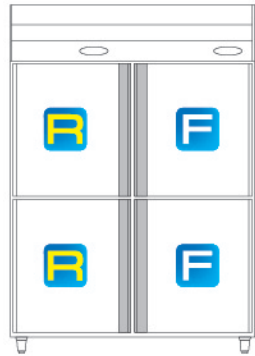

▷ REFRIGERATOR &
FREEZER
HRF-148MA-S

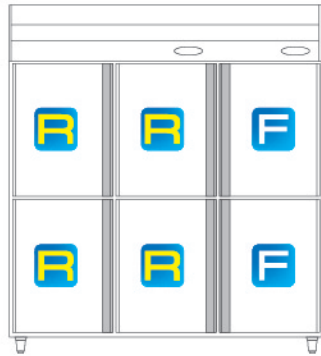

▷ REFRIGERATOR &
FREEZER
HRF-188MA-S

F FREEZER

R REFRIGERATOR

A-FIT SERIES Combo

Reach-in Type	HRF-78MA-S	HRF-128MA-S	HRF-148MA-S	HRF-188MA-S
POWER SUPPLY	1Phase 220-240V 50Hz	1Phase 220-240V 50Hz	1Phase 220-240V 50Hz	1Phase 220-240V 50Hz
HEAT REJECTION	1030W	1140W	1140W	1320W
STORAGE CAPACITY	540L	908L	1100L	1523L
	REFRIGERATOR FREEZER 260L 280L	REFRIGERATOR FREEZER 454L 454L	REFRIGERATOR FREEZER 550L 550L	REFRIGERATOR FREEZER 1025L 498L
EXTERNAL DIMENSIONS	W700-D800-H2050	W1200-D800-H2050	W1400-D800-H2050	W1800-D800-H2050
NET WEIGHT	121kg	167kg	183kg	216kg
* OPERATION CONDITIONS : Ambient Temperature 5°C ~ 43°C Voltage Range: Rated Voltage ±6%				
* Height Dimension Includes Leg Height Of 150mm				
				REFRIGERATOR TEMPERATURE CONTROL: -6°C ~ 12°C
				FREEZER TEMPERATURE CONTROL: -23°C ~ -7°C